

BullsEye NFC Wet Inlay


ISO 14 443 A

NXP NTAG216

Sales code 3002649

Mechanical dimensions

A	Antenna size	35 mm	± 0,5 mm	1,378 in
B	Die-cut size	38 mm	± 0,2 mm	1,496 in
C	Web width	41 mm	± 0,5 mm	1,614 in
D	Pitch, length per piece MD	42 mm	± 1,5 mm	1,654 in
E	Die-cut to web edge	1,5 mm	± 1,5 mm	0,059 in
F	Die-cut to register mark	0,5 mm	± 1,0 mm	0,020 in
G	Antenna to die-cut (MD)	1,5 mm	± 1,5 mm	0,059 in
	Thickness of the IC	75 µm	± 10 %	
	Overall thickness of the transponder package (excluding IC and siliconized paper)	136 µm	± 10 %	

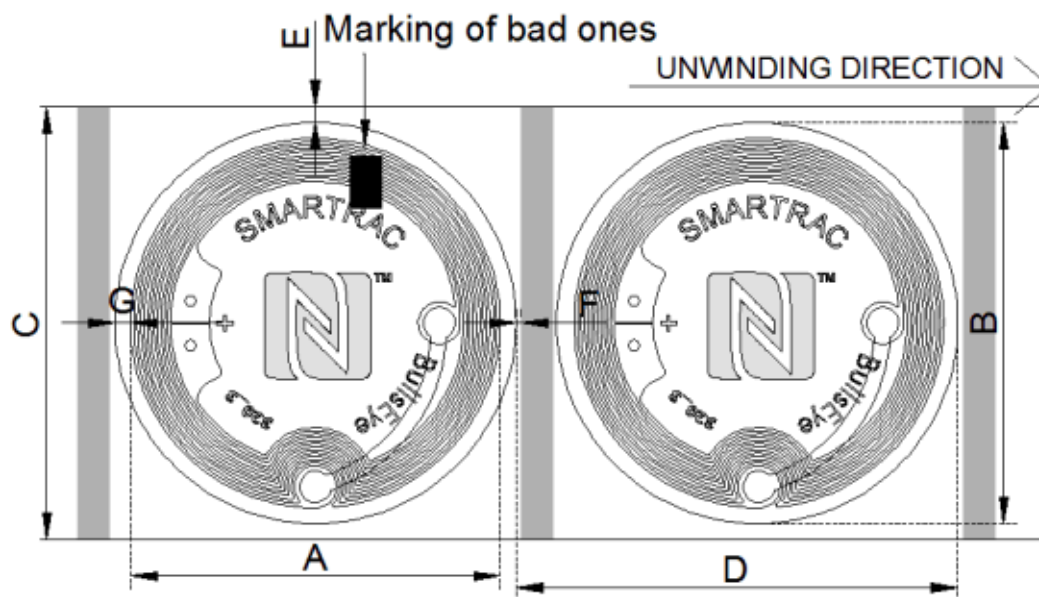

Electrical characteristics

Integrated Circuit (IC)	NXP NTAG216
Air interface protocol	ISO 14 443 A
Operation frequency	13,56 MHz
Unloaded resonance frequency	13,37 MHz ± 0,35 MHz
Memory	888 bytes


General characteristics of transponder

Operating temperature (electronics parts)	-25 °C / +70 °C	-13 °F / 158 °F
ESD voltage immunity	± 2 kV peak HBM	
Shelf life: From the date of manufacture 2 years in	+20 °C, 50 % RH	68 °F, 50 % RH
Bending diameter (D)	> 50 mm, tension less than 10 N	

Delivery form

Transponder format	Die-cut	
Transponder face material	Clear PET 12	
Transponder backing material	Siliconized Paper 56	
Transponder antenna material	Aluminum	
Transponder adhesive	RA-5	
- labelling temperature	min. +0 °C	min. 32 °F
- usage temperature	-20 °C - 80 °C	-4 °F - 176 °F
- peel	min. 2 N / 25 mm (FTM 1)	
Final inspection	100 %, known faulty ones marked	
Minimum delivery yield	95 %	
Reel Label	Reel number, Material number, Material description, Yield, Qty of functional inlays, Qty of non-functional inlays, Date	
Printability	Needs to be tested by customer	

Structure

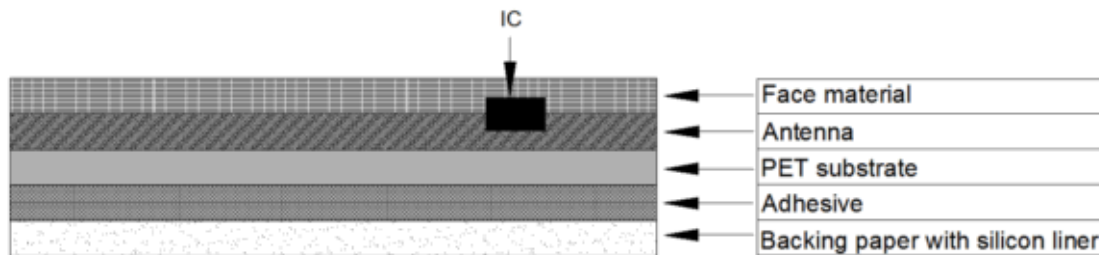

Delivery details

Appearance	Single row reel form
Reel core	Paper core inner diameter 76 mm (3 in)
Transponder alignment	Chip at rear of transponder
Winding of the reel	Face out
Reel size	4000 pcs/reel
Package size	16000 pcs/box Deliveries only in full packages.

Disclaimer:

SMARTRAC reserves the right to change its products and services at any time without notice. Our recommendations are based on our best knowledge and experience. As the products are used outside our control we cannot take responsibility for any damage that may be caused when using the product. Use extra care in handling the product.

This technical specification replaces all earlier ones.

Version	1
Update date	5 September 2013
Author	SMARTRAC / k731743
Approved	SMARTRAC / 5.9.2013 k731451

